

Modeling Herds and Their Evolvments from Trajectory Data

Yan Huang¹, Cai Chen², Pinliang Dong³

¹Department of Computer Science
University of North Texas

², ³Department of Geography
University of North Texas

GIScience, 2008

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F, P, R in Herd
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F , P , R in Herd
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Trajectories of Moving Objects



- Many moving objects exist in the air, on the ground, or in the ocean.
- A single trajectory is the time-stamped path of a moving object through space over time.

Illustrations of Herds

- Given a set of trajectories, we propose a new spatio-temporal pattern named **Herd**.





Figure: Trajectories and Herds

We have six trajectories (O_1, O_2, \dots, O_6) over two time snapshots. Suppose we have A, B clusters in snapshot t_i and they will evolve into A, B, C clusters in snapshot t_{i+1} , where C is a new cluster formed in t_{i+1} .


The Dynamics and Mobilities of Herds

- Herds form different groups in the course of the migrations and other behaviors of their members.
- In our work, we further categorize herd's evolvments as **expand**, **join**, **shrink**, and **leave**.

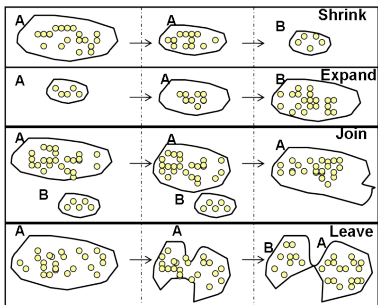


The Dynamics and Mobilities of Herds

- Herds form different groups in the course of the migrations and other behaviors of their members.
- In our work, we further categorize herd's evolvments as **expand**, **join**, **shrink**, and **leave**.

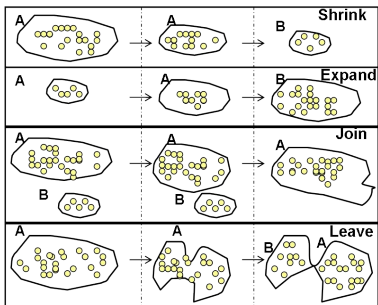

The Dynamics and Mobilities of Herds

- Herds form different groups in the course of the migrations and other behaviors of their members.
- In our work, we further categorize herd's evolvments as **expand**, **join**, **shrink**, and **leave**.

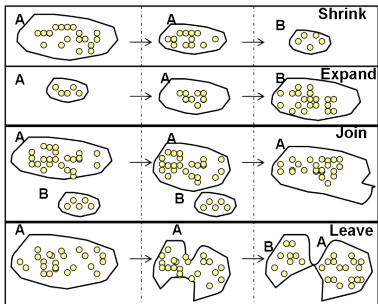

Outline

- 1 Background
 - The Problem
 - **Previous Work**
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F , P , R in Herd
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Trajectory Data Analysis

- **Transformations of Spatial Entity [5, 7, 8]**
Measuring changes such as shape, size, orientation, and location
- **Single Trajectory Analysis [2, 13, 4, 12]**
Depicting one specific moving entity, it mainly focuses on looking for individual spatial patterns, and creating predictive models for the moving entity.
- **Multiple Trajectory Analysis [1, 10, 3, 11, 6, 9]**
Detecting generic *spatial-temporal patterns* such as flock, leadership, convergence etc.
- We proposed another *spatial-temporal pattern*: **Herd** by exploring their **quantitative** changes and **qualitative** changes during their interactions over time.

Trajectory Data Analysis

- **Transformations of Spatial Entity [5, 7, 8]**
Measuring changes such as shape, size, orientation, and location
- **Single Trajectory Analysis [2, 13, 4, 12]**
Depicting one specific moving entity, it mainly focuses on looking for individual spatial patterns, and creating predictive models for the moving entity.
- **Multiple Trajectory Analysis [1, 10, 3, 11, 6, 9]**
Detecting generic *spatial-temporal patterns* such as flock, leadership, convergence etc.
- We proposed another *spatial-temporal pattern*: **Herd** by exploring their **quantitative** changes and **qualitative** changes during their interactions over time.

Trajectory Data Analysis

- **Transformations of Spatial Entity [5, 7, 8]**
Measuring changes such as shape, size, orientation, and location
- **Single Trajectory Analysis [2, 13, 4, 12]**
Depicting one specific moving entity, it mainly focuses on looking for individual spatial patterns, and creating predictive models for the moving entity.
- **Multiple Trajectory Analysis [1, 10, 3, 11, 6, 9]**
Detecting generic *spatial-temporal patterns* such as flock, leadership, convergence etc.
- We proposed another *spatial-temporal pattern*: **Herd** by exploring their **quantitative** changes and **qualitative** changes during their interactions over time.

Trajectory Data Analysis

- **Transformations of Spatial Entity [5, 7, 8]**
Measuring changes such as shape, size, orientation, and location
- **Single Trajectory Analysis [2, 13, 4, 12]**
Depicting one specific moving entity, it mainly focuses on looking for individual spatial patterns, and creating predictive models for the moving entity.
- **Multiple Trajectory Analysis [1, 10, 3, 11, 6, 9]**
Detecting generic *spatial-temporal patterns* such as flock, leadership, convergence etc.
- We proposed another *spatial-temporal pattern*: **Herd** by exploring their **quantitative** changes and **qualitative** changes during their interactions over time.

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F, P, R in *Herd*
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Measurements in IR

Traditionally, the *Precision*(P), *Recall*(R) and *F-Score*(F) measurements have been used for evaluating the performance of information retrieval systems.



$$\text{Recall} = \frac{|\text{relevant documents}| \cap |\text{retrieved documents}|}{|\text{relevant documents}|}$$



$$\text{Precision} = \frac{|\text{relevant documents}| \cap |\text{retrieved documents}|}{|\text{retrieved documents}|}$$



$$\text{F-score} = \frac{2 \times \text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}$$

Measurements in IR

Traditionally, the *Precision*(P), *Recall*(R) and *F-Score*(F) measurements have been used for evaluating the performance of information retrieval systems.



$$\text{Recall} = \frac{|\text{relevant documents}| \cap |\text{retrieved documents}|}{|\text{relevant documents}|}$$



$$\text{Precision} = \frac{|\text{relevant documents}| \cap |\text{retrieved documents}|}{|\text{retrieved documents}|}$$



$$\text{F-score} = \frac{2 \times \text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}$$

Measurements in IR

Traditionally, the *Precision*(P), *Recall*(R) and *F-Score*(F) measurements have been used for evaluating the performance of information retrieval systems.



$$\text{Recall} = \frac{|\text{relevant documents}| \cap |\text{retrieved documents}|}{|\text{relevant documents}|}$$



$$\text{Precision} = \frac{|\text{relevant documents}| \cap |\text{retrieved documents}|}{|\text{retrieved documents}|}$$



$$\text{F-score} = \frac{2 \times \text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}$$

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - **Adoption of Measurements in *Herd***
 - Derivations of F, P, R in Herd
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Adoption of Measurements in *Herd*

If we treat moving entities in trajectory data as documents in retrieval system. We have

$$R(H(t), H'(t+i)) = \frac{|H(t) \cap H'(t+i)|}{|H(t)|}$$

where $H(t)$ is a herd snapshot at time t and $H'(t+i)$ is another herd snapshot at time $t+i$.

$$P(H(t), H'(t+i)) = \frac{|H(t) \cap H'(t+i)|}{|H'(t+i)|}$$

$$F(H(t), H'(t+i)) = \frac{2 \times P(H(t), H'(t+i)) \times R(H(t), H'(t+i))}{P(H(t), H'(t+i)) + R(H(t), H'(t+i))}$$

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - **Derivations of F, P, R in *Herd***
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Derivations of F, P, R in Herd

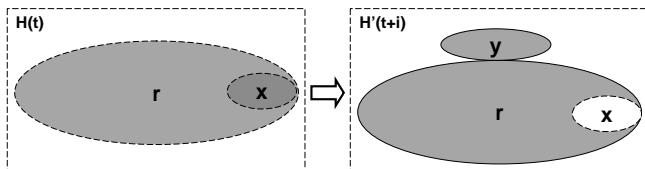


Figure: Generic Herd's Evolvments from t to $t + i$

The *recall* is:

$$R(H(t), H'(t + i)) = \frac{|r|}{|r| + |x|}$$

where $|r \cup x|$ denoting the members of a herd snapshot $H(t)$ at time t .

Derivations of F, P, R in Herd

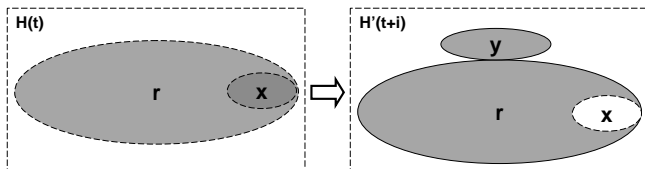


Figure: Generic Herd's Evolvments from t to $t + i$

The *precision* is:

$$P(H(t), H'(t + i)) = \frac{|r|}{|r| + |y|}$$

Derivations of F, P, R in Herd

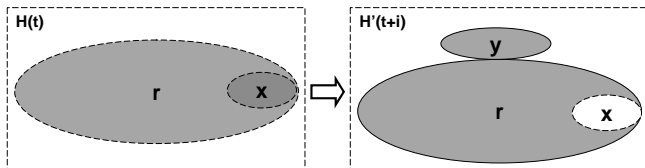


Figure: Generic Herd's Evolvments from t to $t + i$

F -score will be (please note that r, x, y are disjoint):

$$F(H(t), H'(t+i)) = \frac{2 \times P \times R}{P + R} = \frac{2 \times \frac{|r|}{|r \cup y|} \frac{|r|}{|r \cup x|}}{\frac{|r|}{|r \cup y|} + \frac{|r|}{|r \cup x|}} = \frac{2 \times |r|}{2 \times |r| + |x| + |y|}$$

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F , P , R in *Herd*
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Measuring Quantitative and Qualitative Changes

We consider that herd undergoes:

- **quantitative** change if $|x| + |y| < |r|$, that is:

$$F(H(t), H'(t+i)) > \frac{2}{3}$$

- **qualitative** change if $|x| + |y| \geq |r|$, that is:

$$F(H(t), H'(t+i)) \leq \frac{2}{3}$$

Measuring Quantitative and Qualitative Changes

For **qualitative** change, it can be further divided into the following scenarios:

- $H(t)$ is shrank or left by others into $H'(t+i)$. When $|x| \geq |r|$ and $|y| < |r|$, that is,

$$R(H(t), H'(t+i)) = \frac{|r|}{|r \cup x|} \leq \frac{1}{2}, P(H(t), H'(t+i)) = \frac{|r|}{|r \cup y|} > \frac{1}{2}$$

- $H(t)$ is expanded or be joined into $H'(t+i)$. When $|y| \geq |r|$ and $|x| < |r|$, that is,

$$R(H(t), H'(t+i)) = \frac{|r|}{|r \cup x|} > \frac{1}{2}, P(H(t), H'(t+i)) = \frac{|r|}{|r \cup y|} \leq \frac{1}{2}$$

- Otherwise, $H(t)$ and $H'(t+i)$ do not have a relationship.

Measuring Quantitative and Qualitative Changes

We summarize the breakdown of various *qualitative changes* in following table.

Table: Qualitative Changes Based on P, R When $F \leq \frac{2}{3}$

$F < \frac{2}{3}$	$P > \frac{1}{2}$	$P \leq \frac{1}{2}$
$R \leq \frac{1}{2}$	Shrink or Split	No Relationship
$R > \frac{1}{2}$	No Relationship	Expand or Merge

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F , P , R in Herd
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Herd Interaction Graph

- We used *Herd Interaction Graph*, or *Herding*, to represent Herd's *qualitative* and *quantitative* changes in their membership, such as **expand**, **join**, **shrink**, and **leave**.




Figure: Graph representing Herds' Evolutions

Outline

- 1 Background
 - The Problem
 - Previous Work
- 2 Proposed Approaches
 - Measurements in IR
 - Adoption of Measurements in *Herd*
 - Derivations of F , P , R in Herd
 - Measuring Quantitative and Qualitative Changes
- 3 Result and Contribution
 - Result and Contribution
- 4 Evaluation and Summary
 - Evaluation and Summary

Evaluation of Our Herding Model

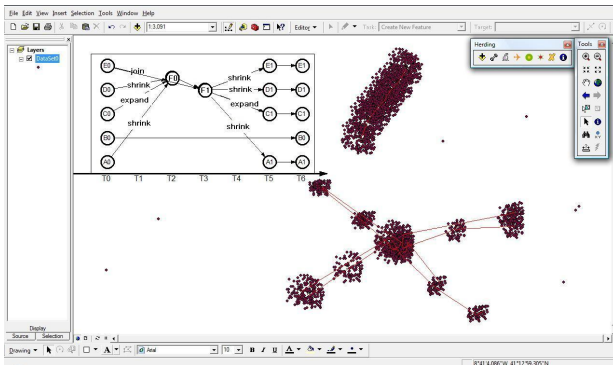


Figure: Herd Interaction Graph in ArcGIS using Synthetic Data

Summary

- Modeling the **dynamics** in membership for moving objects is a challenging task in general.
- We modeled **Herds** along with their **quantitative** and **qualitative** changes during their temporal interactions.
- We used a general graph to visualize *Herd's dynamical changes in membership*.

Summary

- Modeling the **dynamics** in membership for moving objects is a challenging task in general.
- We modeled **Herds** along with their **quantitative** and **qualitative** changes during their temporal interactions.
- We used a general graph to visualize *Herd's dynamical changes in membership*.

Summary

- Modeling the **dynamics** in membership for moving objects is a challenging task in general.
- We modeled **Herds** along with their **quantitative** and **qualitative** changes during their temporal interactions.
- We used a general graph to visualize *Herd's dynamical changes in membership*.

Summary

- Modeling the **dynamics** in membership for moving objects is a challenging task in general.
- We modeled **Herds** along with their **quantitative** and **qualitative** changes during their temporal interactions.
- We used a general graph to visualize *Herd's dynamical changes in membership*.

For Further Reading I



Mihael Ankerst, Markus M. Breunig, Hans-Peter Kriegel, and Jorg Sander.

Optics: ordering points to identify the clustering structure.
SIGMOD Rec., 28(2):49–60, 1999.



Ashbrook and D.Starner.

Learning significant locations and predicting user movement with GPS.

In *Sixth International Symposium on Wearable Computers*, pages 101–108, 2002.

For Further Reading II



Marc Benkert, Joachim Gudmundsson, Florian Hübner, and Thomas Wolle.

Reporting flock patterns.

In ESA'06: Proceedings of the 14th conference on Annual European Symposium, pages 660–671, 2006.



Huiping Cao, Nikos Mamoulis, and David W. Cheung.

Mining frequent spatio-temporal sequential patterns.

In Proceedings of the Fifth IEEE International Conference on Data Mining, pages 82–89, 2005.

For Further Reading III



Christophe Claramunt, Christine Parent, and Marius Theriault.

Design Patterns for Spatio-temporal Processes.

In IFIP 2.6 Working Conference on Database Semantics, DS7, 1997.






Joachim Gudmundsson and Marc van Kreveld.

Computing longest duration flocks in trajectory data.

In GIS '06: Proceedings of the 14th annual ACM international symposium on Advances in geographic information systems, pages 35–42. ACM, 2006.

For Further Reading IV

-  Kathleen Hornsby and Max J. Egenhofer.
Qualitative representation of change.
In *COSIT '97: Proceedings of the International Conference on Spatial Information Theory*, pages 15–33, 1997.
-  Kathleen Hornsby and Max J. Egenhofer.
Shifts in detail through temporal zooming.
In *DEXA Workshop*, pages 487–491, 1999.
-  Panos Kalnis, Nikos Mamoulis, and Spiridon Bakiras.
On discovering moving clusters in spatio-temporal data.
In *International Symposium on Advances in Spatial and Temporal Databases (SSTD)*, pages 364–381, 2005.

For Further Reading V



P. Laube and S. Imfeld.

Analyzing relative motion within groups of trackable moving point objects.

In 2nd International Conference on Geographic Information Science, pages 132–144, 2002.



Patrick Laube, Marc van Kreveld, and Stephan Imfeld.

Finding remote i^a detecting relative motion patterns in geospatial lifelines.

In Developments in Spatial Data Handling, pages 201–215. Springer Berlin Heidelberg, 2005.

For Further Reading VI



Nikos Mamoulis, Huiping Cao, George Kollios, Marios Hadjieleftheriou, Yufei Tao, and David W. Cheung.
Mining, indexing, and querying historical spatiotemporal data.

In KDD '04: Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining, pages 236–245. ACM, 2004.



Neil Sumpter and Andrew J. Bulpitt.
Learning spatio-temporal patterns for predicting object behaviour.

Image Vision Comput., 18(9):697–704, 2000.